



**MARQUETTE MICHIGAN 300 TON
PER HOUR / PARALLEL FLOW
ASPHALT PLANT**



VIRGIN MATERIAL
BINS

4 BINS
12'3" X 8'9"



VIRGIN MATERIAL BINS



VIRGIN MATERIAL CONVEYORS




VIRGIN MATERIL BINS

12'3" X 8'9"





VIRGIN MATERIAL CONVEYORS

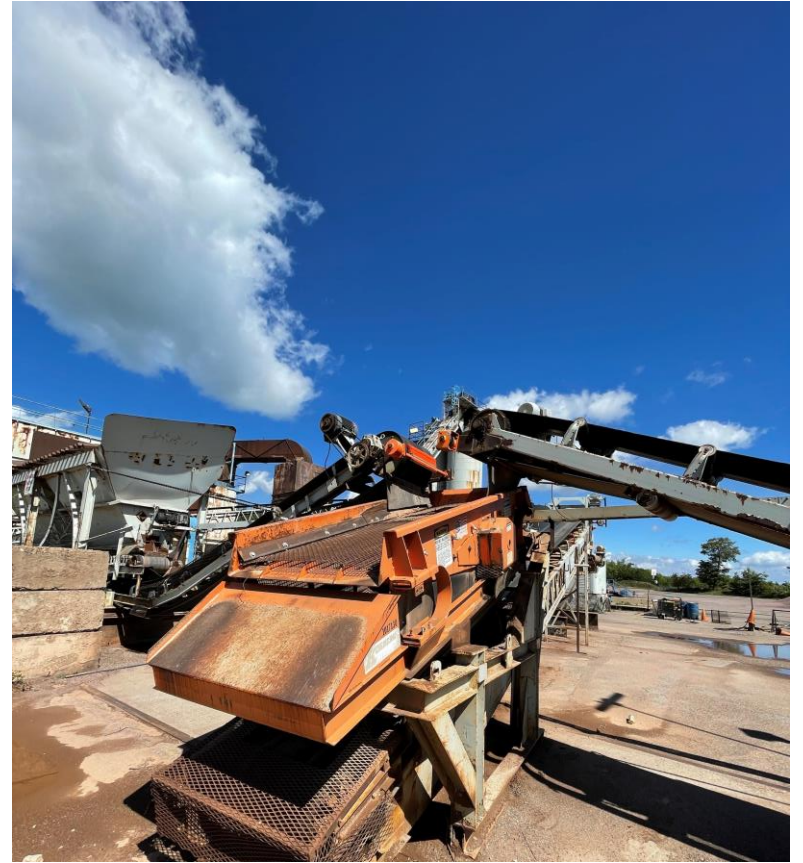

VIRGIN MATERIAL SCREEN DECK





**RECYCLE
BINS (2)**

7'7" WIDE X 16' LONG



RECYCLE SCREEN DECK

RECYCLE CONVEYORS




RUBBLE HOG



HAUCK BURNER



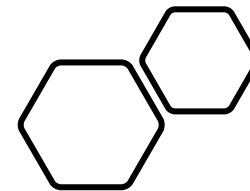



DRUM 47' LONG X 9' DIAMETER






**DUCTWORK
TO
BAGHOUSE**





STANDARD
HAVENS
BAGHOUSE

60,000 CFM

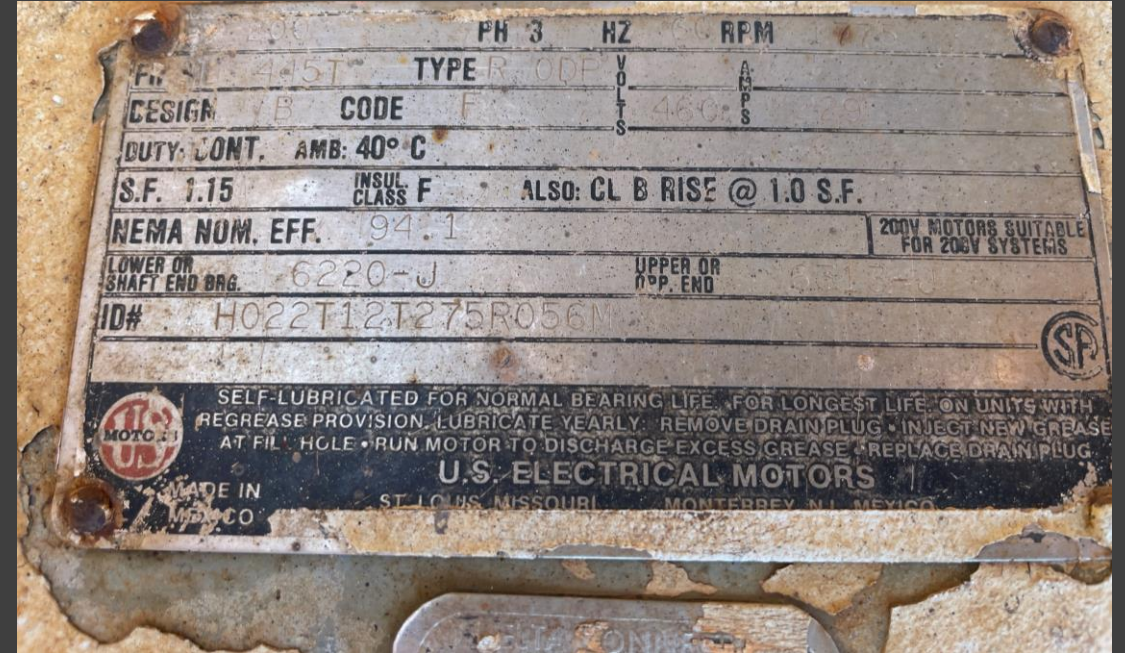

BAGHOUSE
EXHAUST
FAN


1775 RPM

BAGHOUSE AUGER



STANSTEEL HOT OIL HEATER



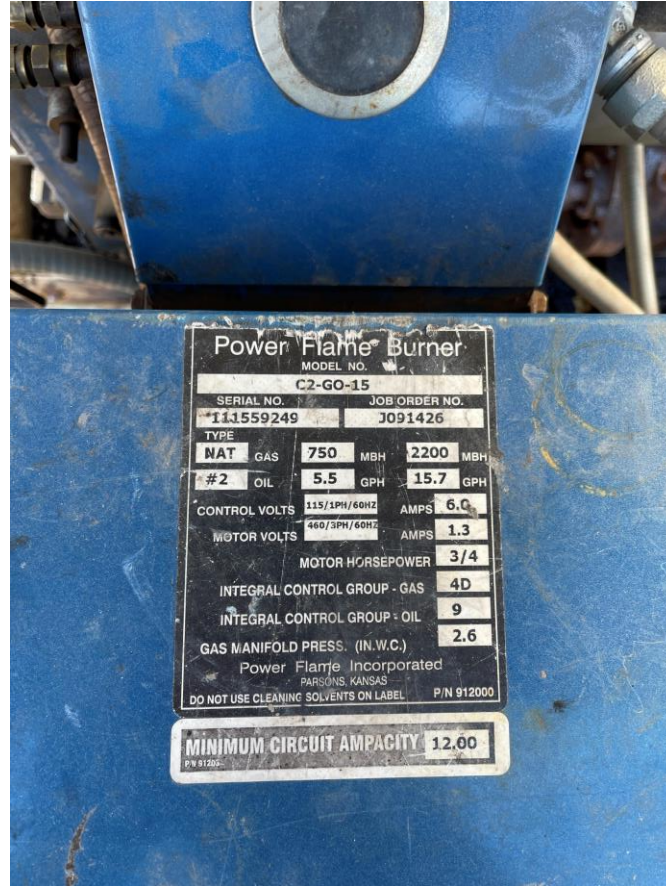

POWER FLAME BURNER

MODEL C2-GO-15



UL LISTED **STEELTANK**
A MANUFACTURING CO., INC.
Mancelona, Michigan
ABOVEGROUND TANK FOR FLAMMABLE LIQUIDS
NO. A60530029


1. This tank is intended for stationary installation only.
2. Consult local authorities before installation of tank.
3. This tank requires emergency relief venting capacity not less than:
● 84,000 cubic feet per hour (4" NPT) ■ 147,000 cubic feet per hour (6" NPT)

The Annular space requires
Emergency Venting.
Capacity not less than

- 84,000 CFH (4")
- 147,000 CFH (6")

Pressurize Primary Tank when
pressure testing Annular Space.

HOT OIL HEATER FUEL TANK

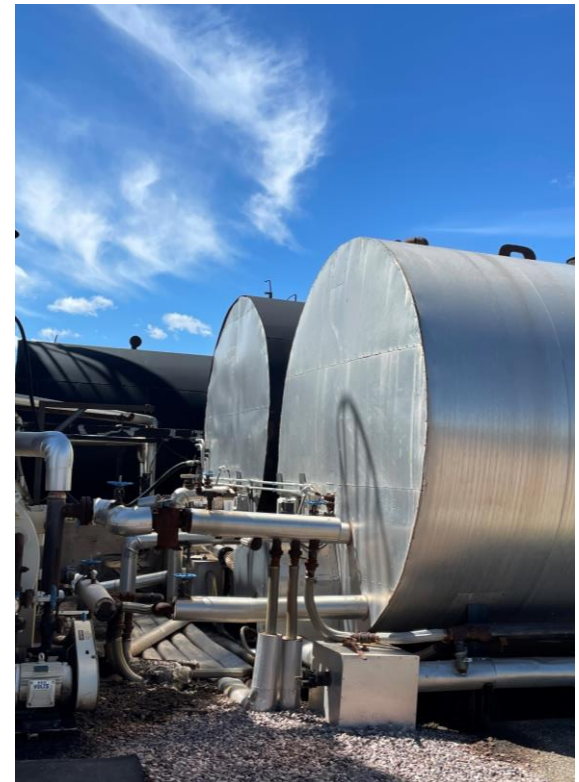


AC TANKS (3)

SLAT
CONVEYOR
TO SILOS




TWIN
200 TON
CAPACITY
SILOS



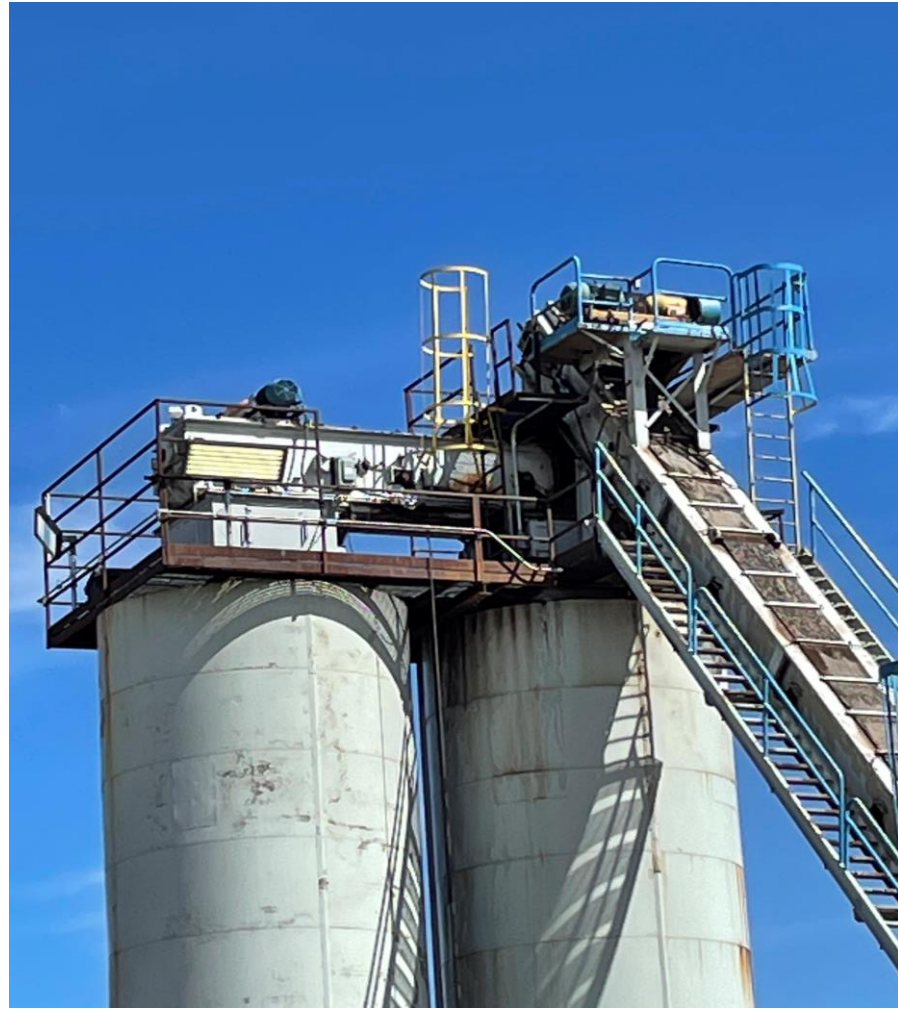

USED OIL TANK WITH CONTAINMENT TANK

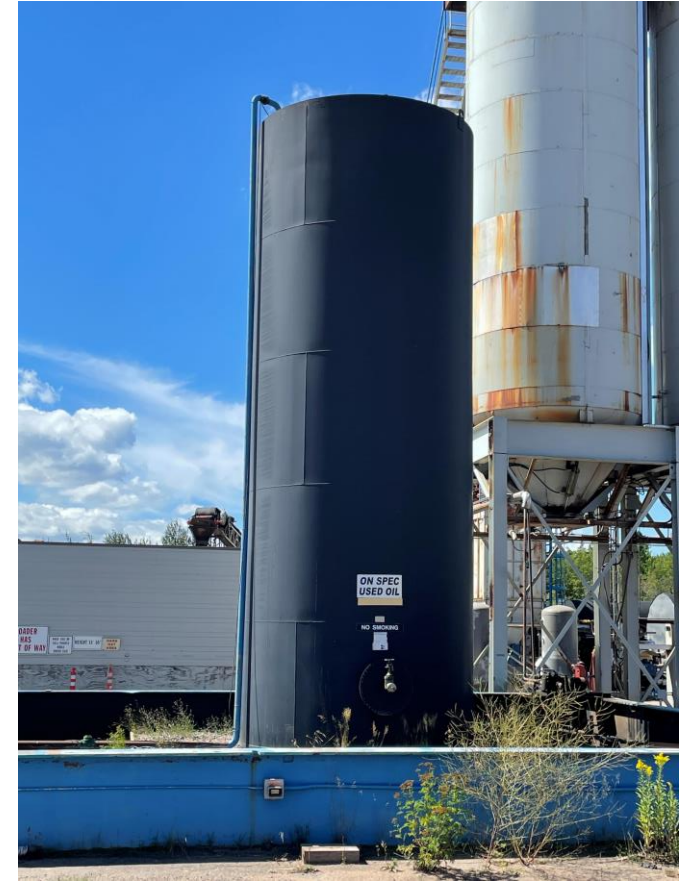



100 TON CAPACITY TRUCK SCALE




TOOL TRAILER / WORKSHOP





CONTROL HOUSE

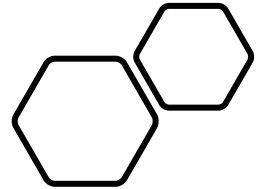



End of slide show!